


dalma

7024.01 - 7024.22





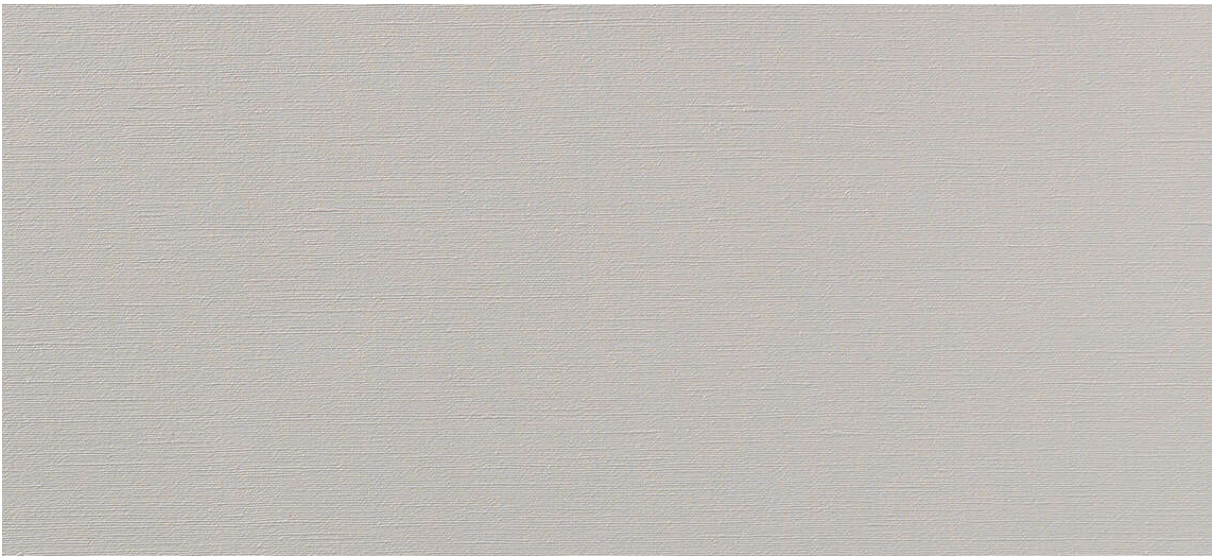



















binder	colorfastness to crocking
upholstery	ISO 105-X12
03	wet 5 / dry 5 (scale 1–5)
vinyl	AATCC 8
	wet 5 / dry 5 (scale 1–5)
description	colorfastness to light
silk woven structure	ISO 105-B02
composition	7 (scale 1–8)
vinyl coat, cotton/polyester backing	ASTM D4329: 150 hours
width	4 (scale 1–5)
± 137-140 cm, ± 54-55 inches	resistance to blood, urine, sweat and sebum
weight	EN 12720
backing: ± 110 gr/m², ± 5 oz/yd¹	5 (scale 1–5)
coating: ± 690 gr/m², ± 31 oz/yd¹	breaking strength
thickness	ISO 1421
1.1 mm, 0.04 inches	length 470 N / width 313 N
flame retardancy	ASTM D2261
EN 1021/1-2	length 7.3 lbs / width 9.2 lbs
BS 5852, crib 5	flexibility
NF P 92/503 – 507, M2	ISO 7854
NF D60-013 (AM 18)	400.000 cycles
DIN 4102, B2	adhesion to coating
UNI 9175, classe 1 IM	ASTM D751
Cal TB 117	length 8.3 lbf / width 5.2 lbf
NFPA 260, class 1	
IMO 2010 FTP part 8	
abrasion	
ISO 12947-2	
> 300.000 rubs martindale	
ASTM D4157	
100.000 double rubs wyzenbeek	



dalma

7024.01 - 7024.22

								
7024.01	7024.02	7024.03	7024.04	7024.05	7024.06	7024.07	7024.08	7024.09
								
7024.10	7024.11	7024.12	7024.13	7024.14	7024.15	7024.16	7024.17	7024.18
								
7024.19	7024.20	7024.21	7024.22					